

NDX™ UTV TIRE & WHEEL SYSTEM



The Tire That Never Goes Flat

OTR Wheel Engineering's game-changing, patent-pending NDX™ tire & wheel system features OEM-approved treads, in popular sizes, designed for utility and rough terrain vehicles. Sold as an assembly—tire and wheel included—it's a bolt-on replacement for stock tires and wheels that's easy to install.

100% Uptime + 0% Downtime = Maximum Productivity, Utilization, Safety & Value!



OTR'S innovative, patent-pending NDX tire lasts up to 2x longer than airless options, even when carrying extreme loads with a 1" hole in its sidewall.



MORE VALUE

- ✔ No downtime from flats = lower life cycle costs & better ROI
- ✔ Heavy-duty construction; long-lasting & ultra-durable
- ✔ Exceptional traction, grip & handling
- ✔ Less deflection—maintains safe ground clearance
- ✔ Wide contact patch enhances traction, stability & braking performance
- ✔ Comfortable ride, comparable or better than pneumatics
- ✔ No maintenance required, tire retains optimal profile at all times

1 flat tire every other week = **26** flat tires annually

 **1** flat tire = **2 HOURS** of lost productivity

2 hours of downtime = **52** hours of lost productivity annually

\$300 = **\$7,800**
cost per incident (lost productivity + labor) in opportunity costs 

The average fleet has **10** vehicles = **\$78,000** lost annually


350 MAG NDX™

TIRE INFORMATION



TIRE	
Description:	350 MAG, NDX
Size:	25x10.00-14
Tread Pattern:	350 MAG, Worksite
Application:	Utility Vehicle, All-Purpose
Ply Rating:	14 PR Effective
Load Index:	84
Speed Symbol:	J
DIMENSIONS	
Diameter, Mounted:	25.1" (637.5 mm)
Width, Mounted:	10.3" (261.6 mm)
Rim Diameter:	14.0" (355.6 mm)
Rim Width:	8.5" (215.9 mm)
Tire Weight:	48 lbs. (21.7 kg)
Tread Depth:	0.75" (19 mm)
INFLATION & LOAD DATA	
Rated Pressure:	0 psi (0 kPa)
Maximum Load:	1,100 lbs. (454 kg)
Maximum Speed:	62 mph (100 km/h)
PERFORMANCE (@ RATED PRESSURE, LOAD & SPEED)	
Rolling Circumference:	74.95" (1,904 mm)
Static Load Radius:	12.05" (306 mm)
Revolutions:	845/mi (525/km)
Deflection:	0.50" (13 mm)



NDX tires reduce fuel consumption by up to 10% compared to other tire options, making it an environmentally friendly solution as well.



Wide contact patch coupled with unique design means an NDX tire maintains an optimal profile, even under heavy loads (as confirmed by deflection measurements).

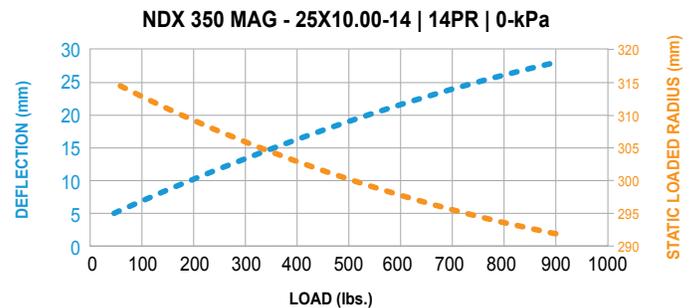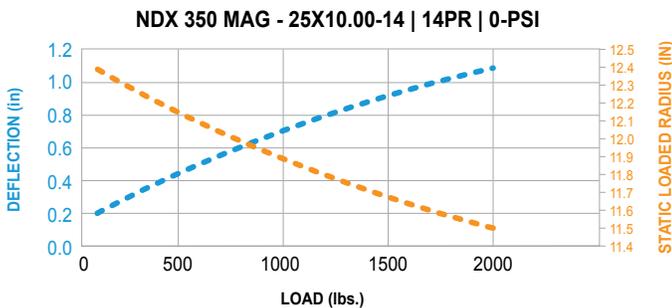

- ✓ **Heavy-duty construction** extends operating life, lasting up to 2x longer than other airless options.
- ✓ **Unique design** maintains same profile as pneumatic tire with NO air required, ensuring safe ground clearance at all times.

- ✓ **Tire design is NOT a limiting factor** in terms of load capacity.
- ✓ **Superior ride comfort**, absorbing bumps and vibration as well if not better than pneumatic tires.